


DIGITAL MULTIMETER G-TECH DMM 95 AUTO TRMS

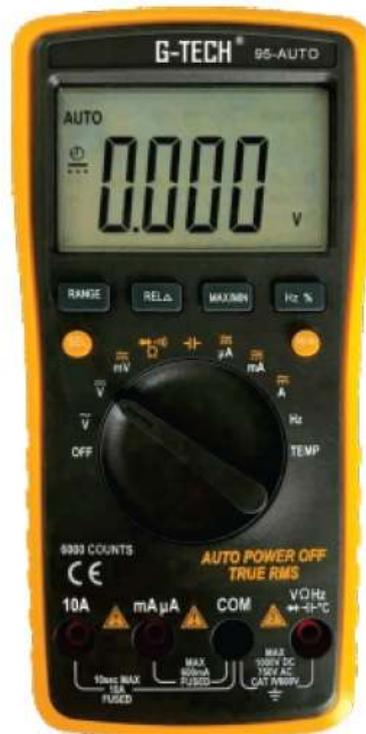

| Function | Measuring Range | Precision |
|-------------|----------------------------|-----------|
| DC Voltage | 600mV~1000V | ± 1% |
| AC Voltage | 600mV~1000V | ± 2.3% |
| DC Current | 600uA~10A | ± 1.8% |
| AC Current | 600uA~10A | ± 2.2% |
| Resistance | 600-6k-60k-600k-6M-60M ohm | ± 1.2% |
| Capacitance | 6nf~6mF | ± 10.8% |
| Features | | |
| LCD | counts | 6000 |
| Temperature | -20°C -1000°C | |
| Frequency | 10Hz-10MHz | |
| Buzzer | <50 Ohms | |
| Data Hold | | |
| Routine | | |